



## EOS M 300 Series Digital Additive Manufacturing for the Industrial Production of High-Quality Metal Parts

- reliable and repeatable quality
- up to 10x higher productivity
- easily integrated in production



# EOS M 300 Series Enables DMLS Quality with up to 10x Higher Productivity

Designed for industrial applications, the EOS M 300 Series offers multiple configuration options combined with safety and security features enabling digital Additive Manufacturing. The platform offers the flexibility to choose the degree of automation that best suits your needs for an optimized workflow as well as the option to easily ramp-up as demand increases.



## Exposure Module




Up to four precise lasers expose in a 300 x 300 mm square with each laser covering the entire area.

## Clamping Modules



Easy transition to post-processing Select from 3 different models for easy integration to the post-processing equipment in your production facility.

## Dispenser Modules

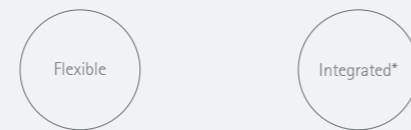

**Flexible Dispenser**  
Offers fast and easy material change.


**Integrated Dispenser**  
Automated feeding enabling closed loop powder supply.

## Material & Process



**EOS Materials** are designed specifically for DMLS and are quality controlled.  
**EOS Processes** are validated ensuring consistent and repeatable part quality.

## EOSTATE Monitoring Suite

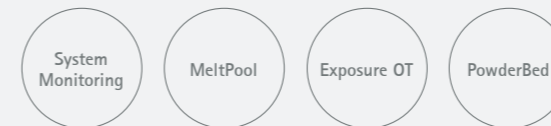

AM industry standard for real-time and post built quality assurance, creating valuable insights for application and process development.

## Part Handling



EOS Transfer Station M

IPM M Setup Station M

**EOS Transfer Station M**  
Fast switch-over of the exchangeable frame.

**IPM M Setup Station M**  
Comfortable gas-tight unpacking from two sides and under inert gas.

**Unpack Module\***  
Automated unpacking integrable easily in the IPM M Setup Station M.

## Powder Handling



**IPCM M extra**  
Manual and flexible powder handling.

**IPCM M pro**  
Semi-automated powder handling.

**IPM M Powder Station L**  
Automatic closed loop powder handling.

## Software



**EOSYSTEM**  
Intuitive industry proven machine software optimized for production.



**EOSPRINT 2**  
Intuitive and easy job preparation and process development.



**EOSCONNECT**  
Easy software integration into a production facility.

● mandatory configuration \*under development

# EOS M 300-4


## Technical Data

Building volume	300 x 300 x 400 mm (11.8 x 11.8 x 15.8 in)
Laser type	Yb-fiber laser; 4 x 400 W
Precision optics	4 F-theta-lenses; 4 high-speed scanners
Scanning speed	up to 7.0 m/s (23 ft./s)
Focus diameter	approx. 100 µm (0.004 in)
Power supply	3 x 80 A
Power consumption	max. 36 kW / typical 26 kW
Inert gas supply	7,000 hPa; 15 m <sup>3</sup> /h (102 psi; 530 ft <sup>3</sup> /h)

## Dimensions & Weight


### EOS M 300-4 with Flex Dispenser

Height: 2,340 mm / Weight: ca. 6,600 kg

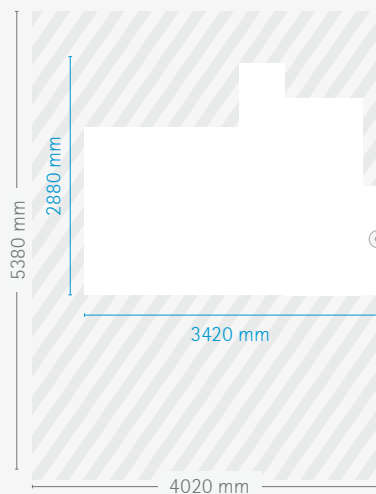


### EOS M 300-4 with Integrated Dispenser

in development

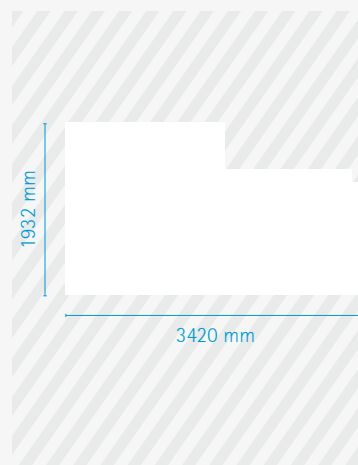


### EOS Transfer Station M

Height: 1,300 mm / Weight: ca. 1,000 kg

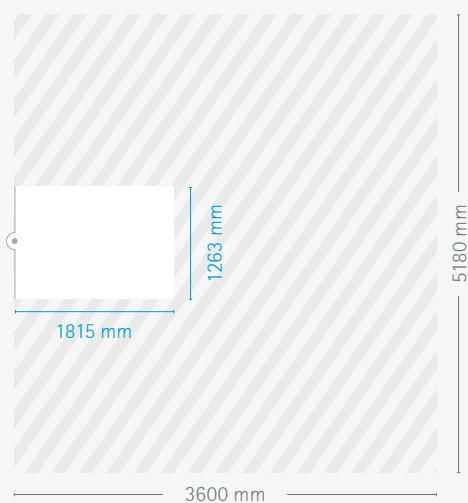

### IPM M Setup Station M

Height: 2,000 mm / Weight: ca. 1,400 kg

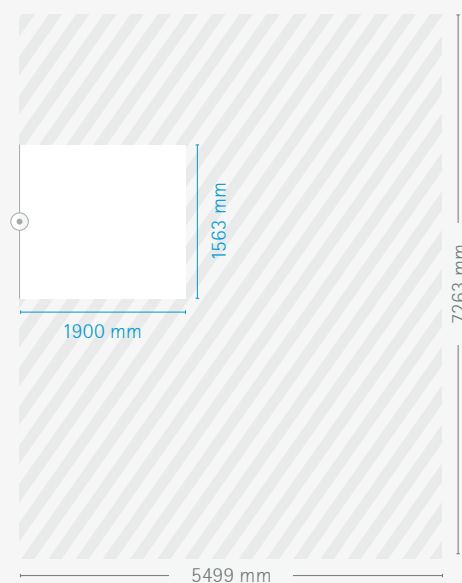

System

Workspace

Interface

## Headquarters

EOS GmbH  
Electro Optical Systems  
Robert-Stirling-Ring 1  
D-82152 Krailling/Munich  
Germany  
Phone +49 89 893 36-0  
Fax +49 89 893 36-285

[www.eos.info](http://www.eos.info)  
[info@eos.info](mailto:info@eos.info)

## Further Offices

EOS France  
Phone +33 437 497 676

EOS Greater China  
Phone +86 21 602 307 00

EOS India  
Phone +91 443 964 8000

EOS Italy  
Phone +39 023 340 1659

EOS Japan  
Phone +81 45 670 0250

EOS Korea  
Phone +82 2 6330 5800

EOS Nordic & Baltic  
Phone +46 31 760 4640

EOS of North America  
Phone +1 877 388 7916

EOS Singapore  
Phone +65 6430 0463

EOS UK  
Phone +44 1926 675 110

